




SPECIFICATION



No. 35-2 for 3/8" Pitch Double Strand Chain

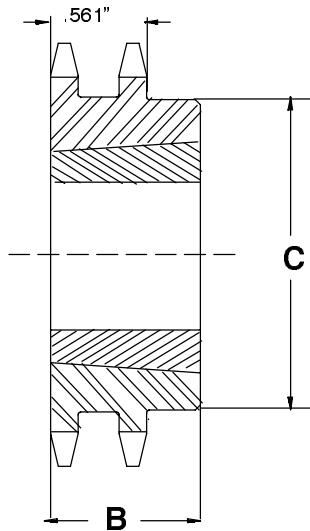

TYPE BTL

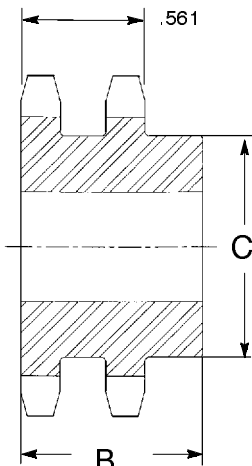

TYPE B

TAPER-LOCK—DOUBLE								
No. Teeth	Spkt. O.D.	Description ★	Part No.	Wt. w/o Bush.	Bore Range		B	C Hub Dia.
					Min.	Max.		
19	2.472	D35BTL19H-1008	101150	.6	1/2	1	0.88	1.81
20	2.593	D35BTL20H-1008	101151	.8	1/2	1	0.88	1.88
21	2.713	D35BTL21H-1008	101152	1.4	1/2	1	0.88	1.81
22	2.833	D35BTL22H-1008	101153	1.7	1/2	1	0.88	1.81
24	3.074	D35BTL24H-1210	101154	1.8	1/2	1-1/4	1.00	2.47
26	3.314	D35BTL26-1210	101155	2.0	1/2	1-1/4	1.00	2.47
30	3.793	D35BTL30-1610	101156	1.8	1/2	1-11/16	1.00	3.06
32	4.032	D35BTL32-1610	101157	2.0	1/2	1-11/16	1.00	3.25
35	4.392	D35BTL35-1610	101158	2.3	1/2	1-11/16	1.00	3.25
40	4.990	D35BTL40-1610	101159	2.9	1/2	1-11/16	1.00	3.25
45	5.588	D35BTL45-1610	101160	3.2	1/2	1-11/16	1.00	3.25
48	5.946	D35BTL48-1610	101161	3.5	1/2	1-11/16	1.00	3.25
54	6.663	D35BTL54-1610	101162	3.9	1/2	1-11/16	1.00	3.25
60	7.380	D35BTL60-1610	101163	4.9	1/2	1-11/16	1.00	3.25
70	8.575	D35BTL70-1610	101164	6.3	1/2	1-11/16	1.00	3.25
80	9.770	D35BTL80-1610	101165	7.9	1/2	1-11/16	1.00	3.25
96	11.680	D35BTL96-1610	101166	9.9	1/2	1-11/16	1.00	3.25
112	13.590	D35BTL112-1610	101167	10.9	1/2	1-11/16	1.00	3.25

★ "H" suffix indicates Hardened Teeth.

REBORABLE SPROCKETS—TYPE B								
No. Teeth	Spkt. O.D.	Description ★	Part No.	Wt.	Bore		B	C Hub Dia.
					Stock	Max.		
12	1.630	D35B12H	105525	.32	1/2	9/16	1.25	0.98
13	1.750	D35B13H	105526	.36	1/2	3/4	1.25	1.13
14	1.870	D35B14H	105527	.44	1/2	13/16	1.25	1.25
15	1.990	D35B15H	105181	.56	1/2	7/8	1.25	1.41
16	2.110	D35B16H	105182	.64	1/2	15/16	1.25	1.47
17	2.230	D35B17H	105183	.74	1/2	1-1/16	1.25	1.59
18	2.350	D35B18H	105184	.84	1/2	1-1/8	1.25	1.72
19	2.470	D35B19H	105528	.96	1/2	1-1/4	1.25	1.84
20	2.590	D35B20H	105529	1.08	1/2	1-5/16	1.38	1.97
21	2.710	D35B21H	105530	1.24	1/2	1-5/8	1.38	2.06
22	2.830	D35B22H	105531	1.42	1/2	1-7/16	1.38	2.19
23	2.950	D35B23H	105532	1.54	1/2	1-1/2	1.38	2.31
24	3.070	D35B24H	105533	1.62	1/2	1-5/8	1.38	2.44
25	3.190	D35B25H	105534	1.66	1/2	1-11/16	1.38	2.56
26	3.310	D35B26	105535	1.98	1/2	3/4	1.38	2.69
30	3.790	D35B30	105536	2.34	1/2	2	1.38	3.16
36	4.510	D35B36	105537	3.00	11/16	1-3/4	1.38	2.50
42	5.230	D35B42	105538	3.80	11/16	1-3/4	1.38	2.50
48	5.950	D35B48	105539	4.66	11/16	1-3/4	1.38	2.50
52	6.430	D35B52	105540	5.40	11/16	1-3/4	1.38	2.50
60	7.380	D35B60	105541	6.84	11/16	1-3/4	1.38	2.50
68	8.340	D35B68	105542	10.01	15/16	2-3/8	1.50	3.50
72	8.810	D35B72	105543	11.04	15/16	2-3/8	1.50	3.50
76	9.290	D35B76	105544	11.94	15/16	2-3/8	1.50	3.50
84	10.250	D35B84	105545	14.98	15/16	2-3/8	1.50	3.50
95	11.560	D35B95	105546	17.42	15/16	2-3/8	1.50	3.50
96	11.680	D35B96	105547	18.14	15/16	2-3/8	1.50	3.50
102	12.400	D35B102	105548	19.92	1	2-3/8	1.50	3.50

★ "H" Suffix indicates Hardened Teeth

See List Price Book MLP for alteration charges.

FEATURES/BENEFITS PAGE PT12-2	SELECTION PAGES PT12-28 - PT12-39	RELATED PRODUCTS PAGES PT12-40 - PT12-42	ENGINEERING/TECHNICAL PAGES PT12-43 - PT12-46
----------------------------------	--------------------------------------	---	--