

NOTES:

- 1. Gates groove profile number: GA-01180-16-S-0
- 2. Mark Size: .050
- 3. Install set screws: 6-40



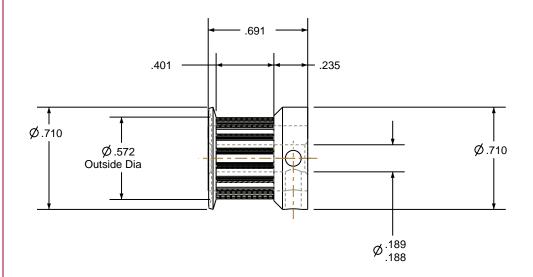



-6-40 UNF- 2B TAP THRUTO BORE #33 DRILL (0.110) THRU TO BORE

Pulley Data		Tolerances	
Number of Grooves:	16	Decimals .X ± .015"	
Belt Pitch:	3 mm	.XX ± .010" .XXX ± .005" Fractions ± 1/64"	
Tooth Type:	PGGT	Angles ± 1° TIR .003 Max	
Pitch Diameter:	0.602		
Outside Diameter:	0.572	This document is the property of Gates Corporation. It may not be reproduced in whole or in part or provided to third parties without written authorization from Gates Corporation. All	
Surface Finish:	125 Micro		
Flange Size:	16-3M-FA		
		rights are reserved including copyrights.	

Drafted By:	-	
Checked By:	-	
Approved By:	-	
This drawing is a stock power transmission component. Details shown which do not affect drive function may be changed without any notification		

Material:	ALUMINUM
iviateriai:	ALUMINUM

Rev	Revision	Date	Ву



Gates Corporation Denver, Colorado

Gates Part No: 3MR-16S-09

Gates Product No: 7843-6001

Finish: CLEAR ANODIZE Drawing Number: 16-3P09-6CA2