HUYETT.COM • 785-392-3017

BOX 232 • MINNEAPOLIS, KS • 67467

SALES@HUYETT.COM • FAX 785-392-2845


INTERNAL THREAD – IMPERIAL


DESCRIPTION

Solid cylindrical pin that has a uniform taper (1/4" per 12") that runs the entire length of the pin with a tapped hole at the large end. The hole assists in removal when used with a bolt or slide hammer. Designed for use in locations where externally threaded pins will not fit or where flush positioning is desirable.

HOW TO IDENTIFY

1. Verify solid tapered (1:48) pin with tapped hole.
2. Measure large end diameter (A).
3. Measure the effective length (B).
4. Find the part in the chart below.



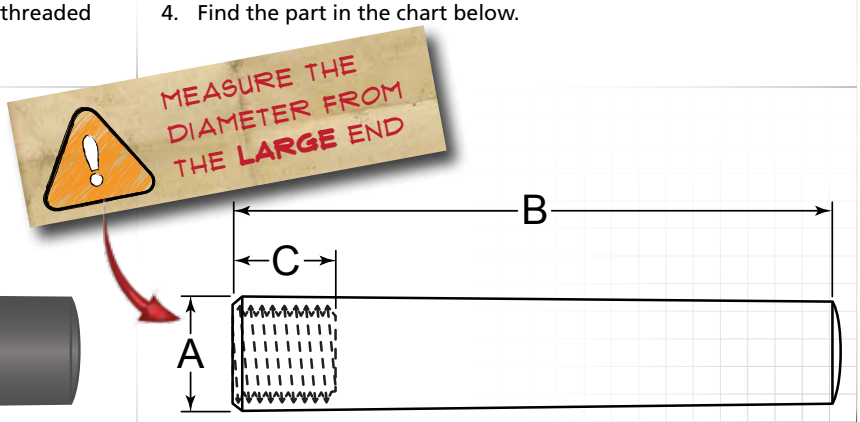

PREFIX — MATERIAL/FINISH

TPTI = CARBON STEEL, PLAIN*

ADDITIONAL SIZES AND FINISHES MAY BE AVAILABLE UPON REQUEST

ITEM NUMBER	PIN NUMBER	(B) EFFECTIVE LENGTH +.010/-.010"	(A) OUTSIDE DIAMETER +.001/-.001"	(C) EFFECTIVE THREAD LENGTH +.010/-.010"	THREAD TYPE	THREAD SIZE	THREAD PITCH
TPTI-04-1000	#4	1.000" (1)	.2503"	.375" (3/8)	UNC	#10	24
TPTI-04-1500	#4	1.500" (1-1/2)	.2503"	.375" (3/8)	UNC	#10	24
TPTI-04-2000	#4	2.000" (2)	.2503"	.375" (3/8)	UNC	#10	24
TPTI-05-2000	#5	2.000" (2)	.2893"	.375" (3/8)	UNC	#10	24
TPTI-06-1000	#6	1.000" (1)	.3413"	.437" (7/16)	UNC	1/4"	20
TPTI-06-1500	#6	1.500" (1-1/2)	.3413"	.437" (7/16)	UNC	1/4"	20
TPTI-06-2000	#6	2.000" (2)	.3413"	.437" (7/16)	UNC	1/4"	20
TPTI-07-1750	#7	1.750" (1-3/4)	.4093"	.500" (1/2)	UNC	5/16"	18
TPTI-08-2000	#8	2.000" (2)	.4923"	.500" (1/2)	UNC	5/16"	18
TPTI-08-2250	#8	2.250" (2-1/4)	.4923"	.500" (1/2)	UNC	5/16"	18
TPTI-08-2500	#8	2.500" (2-1/2)	.4923"	.500" (1/2)	UNC	5/16"	18
TPTI-08-3000	#8	3.000" (3)	.4923"	.500" (1/2)	UNC	5/16"	18
TPTI-08-4000	#8	4.000" (4)	.4923"	.500" (1/2)	UNC	5/16"	18
TPTI-09-3000	#9	3.000" (3)	.5913"	.625" (5/8)	UNC	3/8"	16
TPTI-10-1500	#10	1.500" (1-1/2)	.7063"	.750" (3/4)	UNC	1/2"	13
TPTI-10-2000	#10	2.000" (2)	.7063"	.750" (3/4)	UNC	1/2"	13
TPTI-10-3000	#10	3.000" (3)	.7063"	.750" (3/4)	UNC	1/2"	13
TPTI-10-4000	#10	4.000" (4)	.7063"	.750" (3/4)	UNC	1/2"	13
TPTI-11-3000	#11	3.000" (3)	.8603"	.875" (7/8)	UNC	3/4"	10
TPTI-12-1500	#12	1.500" (1-1/2)	1.0323"	.875" (7/8)	UNC	3/4"	10
TPTI-12-2000	#12	2.000" (2)	1.0323"	.875" (7/8)	UNC	3/4"	10
TPTI-12-3000	#12	3.000" (3)	1.0323"	.875" (7/8)	UNC	3/4"	10

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett

**Limited warranty for surface finish: 30 days from date of shipment. See page 8 for details.*