ROUND SECTION WIRE RINGS

785·392·3017 FAX 785.392.2845

REVISED 09-04

www.huyett.com


EXTERNAL (AXIAL)

MANUFACTURER CROSS-REFERENCE

INDEX PAGE 236.

Anderton	A0900	Eaton	100 Series
Arcon National	XRC		

CLOSED STYLE

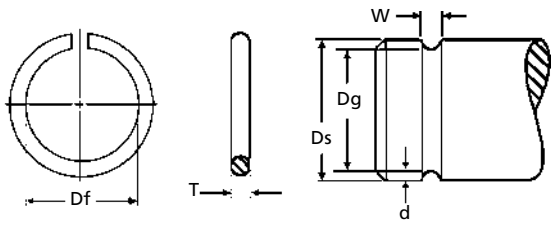

XRC

	SHAFT		RING			GROOVE				WEIGHT	MATERIAL
	Decimal (Ds)	Fraction (Ds)	Free Inside Dia. (Df)		Wire Cross Section (T)	Diameter (Dg)		Depth (d)	Width (W)	Lbs. per 100 Pieces	Spring Steel
XRC-311	.125	1/8	.110	+.000/-6%	.022	.111	+.003/-.000	.007	.024	0.0040	
-312	.156	5/32	.140		.022	.142		.007	.024	0.0050	
-313	.188	3/16	.172		.022	.174		.007	.024	0.0070	
-314	.219	7/32	.202		.022	.205		.007	.024	0.0090	
-315	.250	1/4	.230		.029	.232		.009	.031	0.0150	
-3155	.281	9/32	.260		.029	.263		.009	.031	0.0170	
-316	.312	5/16	.296		.022	.298		.007	.024	0.0110	
-317	.312	5/16	.288		.035	.290		.011	.037	0.0270	
-318	.375	3/8	.353		.029	.357		.009	.031	0.0220	
-319	.375	3/8	.345		.043	.349		.013	.045	0.0500	
-320	.438	7/16	.412	+.000/-5%	.035	.415		.011	.037	0.0380	
-321	.438	7/16	.402		.051	.405		.016	.053	0.0820	
-322	.500	1/2	.468		.043	.474		.013	.045	0.0660	
-323	.500	1/2	.458		.059	.464		.018	.061	0.1250	
-324	.562	9/16	.529		.045	.534		.014	.017	0.0820	
-325	.562	9/16	.518		.062	.524		.019	.064	0.1550	
-326	.625	5/8	.587		.051	.593		.016	.063	0.1150	
-327	.625	5/8	.575		.071	.581		.022	.073	0.2260	
-328	.688	11/16	.649		.051	.655		.016	.053	0.1270	
-329	.688	11/16	.637		.071	.643		.022	.073	0.2480	
-330	.750	3/4	.706		.059	.714	+/-.003	.018	.061	0.1850	
-331	.750	3/4	.690		.085	.698		.026	.087	0.3890	
-332	.812	13/16	.769		.059	.776		.018	.061	0.2000	
-333	.812	13/16	.753		.085	.760		.026	.087	0.4210	
-334	.875	7/8	.823		.071	.831		.022	.073	0.3130	
-335	.875	7/8	.804		.100	.813		.031	.102	0.6280	
-336	.938	15/16	.885		.071	.893		.022	.073	0.3350	
-337	.938	15/16	.867		.100	.875		.031	.102	0.6720	
-338	1.000	1	.938		.085	.948		.026	.087	0.5260	
-339	1.000	1	.917		.118	.926		.037	.120	1.0010	
-340	1.063	1-1/16	1.000	+.000/-4%	.085	1.010		.026	.087	0.6860	
-341	1.063	1-1/16	.979		.118	.988		.037	.120	1.0610	
-342	1.125	1-1/8	1.051		.100	1.063		.031	.102	0.8000	
-343	1.125	1-1/8	1.034		.130	1.045		.040	.132	1.3670	
-344	1.188	1-3/16	1.114		.100	1.125		.031	.102	0.8440	
-345	1.188	1-3/16	1.096		.130	1.107		.040	.132	1.4400	
-346	1.250	1-1/4	1.164		.118	1.176		.037	.120	1.2400	
-347	1.250	1-1/4	1.150		.140	1.162		.044	.142	1.7570	
-348	1.312	1-5/16	1.226		.118	1.238		.037	.120	1.3000	
-349	1.312	1-5/16	1.212		.140	1.224		.044	.142	1.8410	
-350	1.375	1-3/8	1.281		.130	1.295		.040	.132	1.6560	
-351	1.375	1-3/8	1.264		.156	1.277		.049	.158	2.4010	
-352	1.438	1-7/16	1.344		.130	1.357		.040	.132	1.7310	
-353	1.438	1-7/16	1.326		.156	1.339		.049	.158	2.5060	
-354	1.500	1-1/2	1.398		.140	1.412		.044	.142	2.0950	
-355	1.500	1-1/2	1.378		.172	1.392		.054	.174	3.1860	
-356	1.625	1-5/8	1.522		.140	1.537		.044	.142	2.2630	
-357	1.625	1-5/8	1.502		.172	1.517		.054	.174	3.4410	
-358	1.750	1-3/4	1.626		.172	1.642		.054	.174	3.6960	
-359	1.750	1-3/4	1.608		.203	1.624		.063	.205	5.1850	
-361	2.000	2	1.837		.232	1.856		.072	.234	7.7380	
-363	2.250	2-1/4	2.085		.232	2.106	+/-.004	.072	.234	8.6650	
-365	2.500	2-1/2	2.321		.250	2.344		.078	.252	11.1600	
XRC-367	3.000	3	2.816		.250	2.844		.078	.252	13.3200	

		+/-.004	+/-.002

MOST SIZES AVAILABLE IMMEDIATELY • $2 LINE REQUESTED • CALL PLANT FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.
© G.L. Huyett 2004