PRODUCT INFORMATION PACKET



Model No: C182T11DB9B Catalog No: 131971.00 ..1 1/2HP..1170RPM.182.DP.

230/460V.3PH.60HZ.CONT.40C.1.15SF.RIGID.C182T11DB9B.....Wattsaver.AUTOMATIC......

Open Drip Proof (ODP)



Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E






Nameplate Specifications


Output HP	1.5 Hp	Output KW	1.12 kW
Frequency	60 Hz	Voltage	230/460 V
Current	6.2/3.1 A	Speed	1170 rpm
Service Factor	1.15	Phase	3
Efficiency	86.5 %	Duty	CONTINUOUS
Insulation Class	F	Design Code	В
KVA Code	К	Frame	182T
Enclosure	DP	Overload Protector	AUTOMATIC
Ambient Temperature	40 °C	Drive End Bearing Size	6206
Opp Drive End Bearing Size	6205	UL	Recognized
CSA	Υ	CE	Υ
IP Code	22		


Technical Specifications

Electrical Type	SQ CAGE IND RUN	Starting Method	ACROSS THE LINE
Poles	6	Rotation	REV
Mounting	RIGID	Motor Orientation	HORIZONTAL
Drive End Bearing	BALL	Opp Drive End Bearing	BALL
Frame Material	ROLLED STEEL	Shaft Type	Т
Overall Length	13.19 in	Frame Length	9 in
Shaft Diameter	1.13 in	Shaft Extension	2.75 in
Assembly/Box Mounting	F1 ONLY		
Outline Drawing	035464-900	Connection Diagram	5010.2

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 04/19/2018

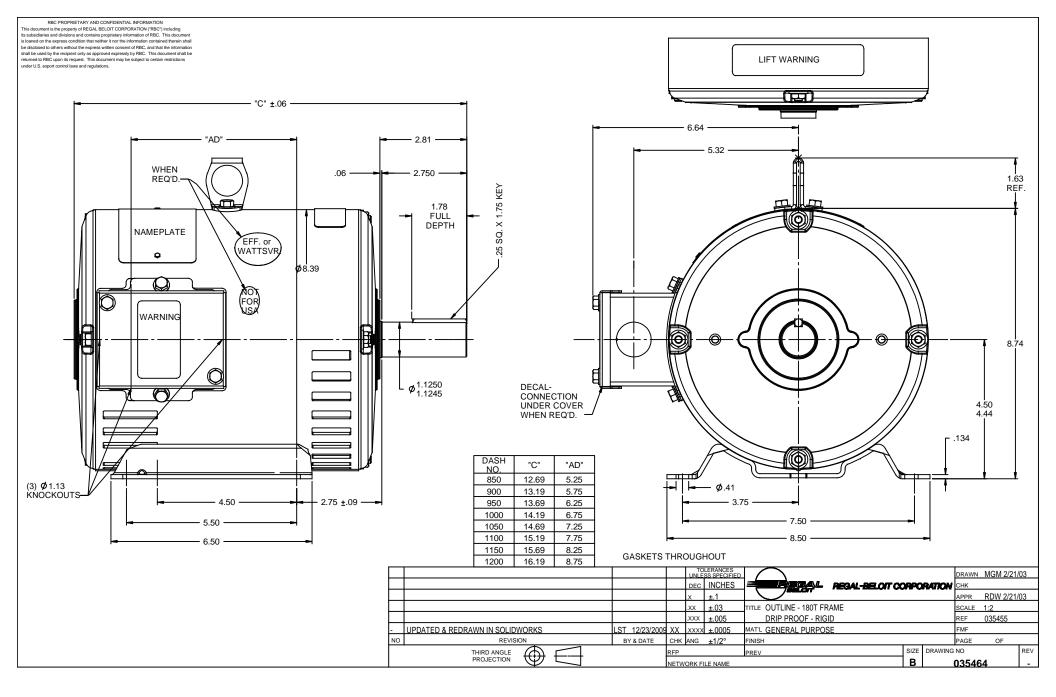

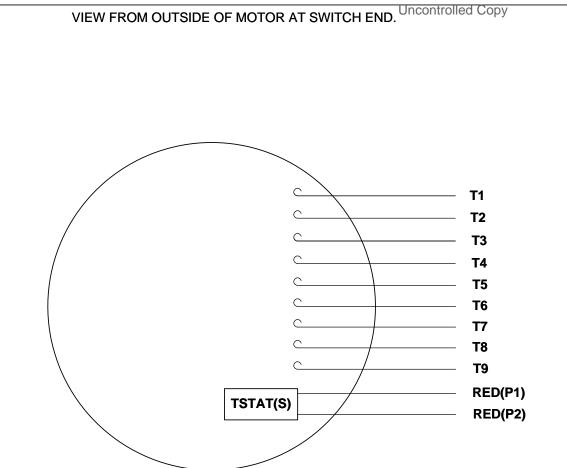

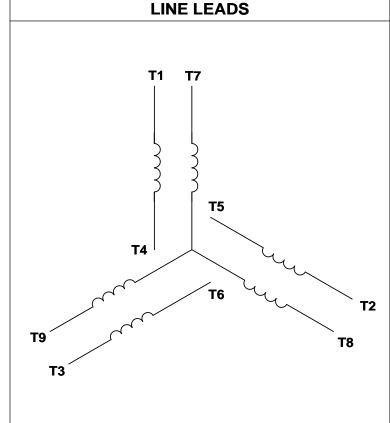

VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

DRAWING REVISION G	REVISION BY MVG	DATE 04/05/2017
ECO-0121253	APPROVED BY SM	DATE 04/05/2017
ECO DESCRIPTION	1	

ADDED P1 & P2 FOR TSTAT

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF
REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY
INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,
BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED
TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT
AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL
BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN
RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

٦	OLER	ANCES UN	ILESS	
(OTHER	WISE SPE	CIFIED:	
	DEC.	INCH	mm	ANGLE
	.X	±0.1	[±2.5]	±0.5°
	.XX	±0.01	$[\pm 0.25]$	
	.XXX	±0.005		
١.	XXXX	±0.0005	$[\pm 0.0127]$	
F	REMOV	E BURRS	& BREAK S	SHARP
E	DGES	: .003/.015	[.076/.381]	I X 45°
			S: R.02 [.51	
N	JACHII	NED SURF	ACES: 125	5/ 3.2/
			INCH √	∕ mm ∨
r	nm SH	OWN IN [E	BRACKETS]

	DRAWN BY DBT 12/16/97 DATE	K	REGAL [™] Regal Beloit America, Inc.	
	APPROVED BY KH 12/17/97	DESC	RIPTION CONN DIAGRAM-EXTERNAL	
	DATE		3 PHASE WITH PROTECTOR	_
,	REFERENCE	MATE DE	RIAL CAL - 004014 (TSTAT) - 080582 PROCESS/FINISH STOCK	
/	THIRD ANGLE PROJECTION	SIZE	DRAWING NUMBER 00501020	SHEET 1 OF 1

