




| Product Submittal |  |
|-------------------|--|
| Name              |  |
| Date              |  |
| Architect/Owner   |  |
| Contractor        |  |
| Tag               |  |
| Notes             |  |

## HoldRite® TRPVCNH2A thru TRPVCNH6A Specification Sheet/Drawing



The TESTRITE® TEE installs in-line between DWV Pipe sections and allows the DWV line to be temporarily blocked for testing (available in 2" - 6"). The TESTRITE TEE includes a TEE and CLEANOUT PLUG which remains in the pipe system after test. It is designed to be used with the removable & reusable TESTRITE TEST WEDGE, which allows temporary blocking of the DWV stack for testing while providing connections for convenient system fill and drain. Drain flow may be interrupted, e.g., for partial tests, by opening and closing an integral valve in the TEST WEDGE. The TESTRITE TEE may be used vertically or horizontally. Install as with any normal fitting. Follow manufacturer's instructions for testing. Remains in the system as a cleanout.

### Product Information:



- Material:
  - Cleanout Tee: PVC, Black
  - Cleanout Plug: NYLON 6/6
  - Spanner Ring: NYLON 6/6, Black
- Complies with ASTM-D2665; compatible with cast iron fittings per ASTM-A888
- Flame/Smoke Development Rating per ASTM E84 25/50 and CAN/ULC S102.2
- Pressure ratings up to 50' head of water / 5 psi (air): 2" & 3" up to 50' head, 4" & 6" up to 40' head
- UPC / IAPMO / IPC / cUPC (Canada) / UL
- Test device sold separately
- Patents issued and Patents Pending
- Standard Cleanout Plug: Use with self-tapping screw (screw & cover by others)  
Optional Cleanout Plug: With installed 1/4"-20 brass insert. ("-B")

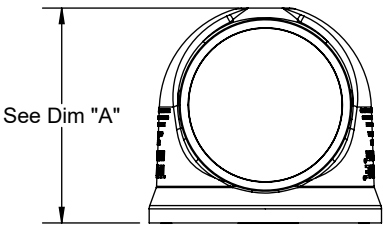

| DIMENSION CHART |                  |                   |                  |                   |
|-----------------|------------------|-------------------|------------------|-------------------|
| Size            | Dim "A"          | Dim "B"           | Dim "C"          | Dim "D"           |
| 2"              | 3.38" (3-3/8")   | Ø3.68" (3-11/16") | 6.45" (6-1/2")   | Ø2.41" (2-13/32") |
| 3"              | 4.61" (5-5/8")   | Ø4.82" (4-13/16") | 7.75" (7-3/4")   | Ø3.50" (3-1/2")   |
| 4"              | 5.59" (5-19/32") | Ø6.05" (6-1/16")  | 8.95" (8-15/16") | Ø4.49" (4-1/2")   |
| 6"              | 7.65" (7-21/32") | Ø8.87" (8-7/8")   | 12.48" (12-1/2") | Ø6.43" (6-7/16")  |

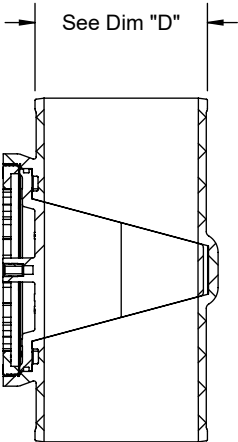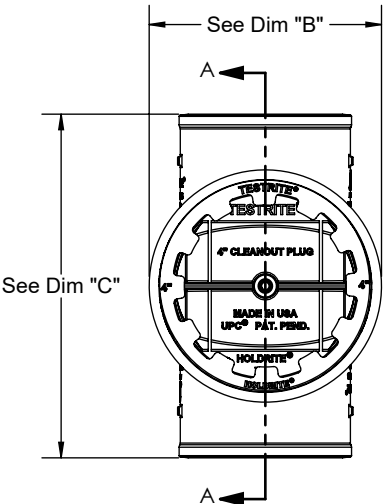

SECTION A-A

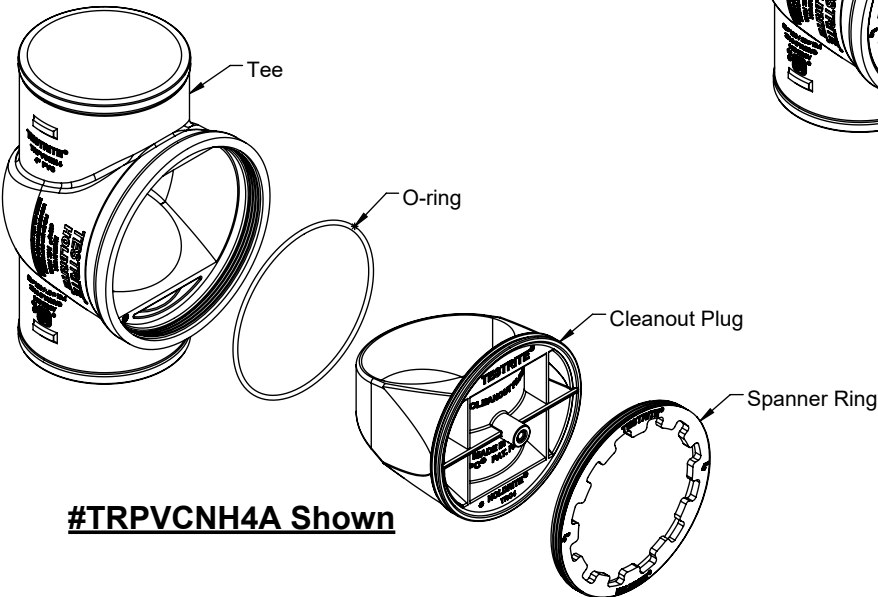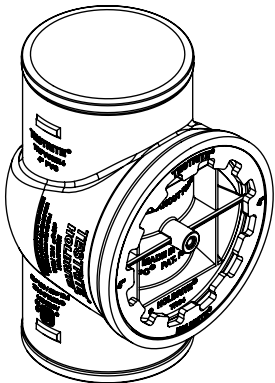

**#TRPVCH4A Shown**